
# **§**SpaceMaker®



Bi-Parting CS SpaceMaker with glazed doors



Single with glazed door

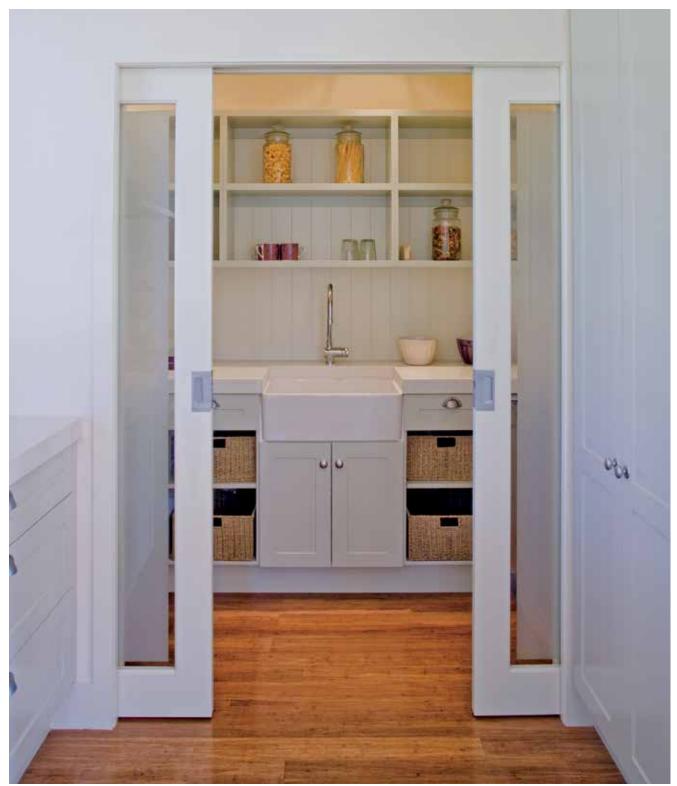

Single with flush door



Single with grooved door





### **Features**

**CS SpaceMaker** is a functional and efficient alternative to conventional surface sliding or hinged doors. Available in standard residential sizes and in both Single and Bi-Parting options, the SpaceMaker is a practical solution for any home.

- 1 Track
  - One piece extruded aluminium.
- Head jambs
  Unique design
  eliminates the need for

unsightly pelmets.

- Closing jamb
  Always quoted as standard.
- Back stud
  One piece extruded aluminium.
- Split jambs
  Timber jamb fixed to
  aluminium split jamb.

- Pine nogs
  - Fitted on both sides and offset for adjacent wall fixing. Extra nogs are available if required.
- Bottom plate Heavy duty, one piece extruded aluminium.
- Skirting blocks
  Fitted on either side of the bottom plate, to fix both linings and skirting.
- No visible floor track
  Hidden T-guide at the
  base of the cavity guides
  the door through the
  opening.

# 7 8

# **Options**

Incorporate any of the architectural detail options below with the CS SpaceMaker cavity slider to create a specific look or to provide a unique solution to your design requirements.

# Technical Information

### Useful formulas (online calculator on our website)

Dimension Required	Single	Bi-Parting
Trim height*	DH + 95	DH + 95
Trim width*	(DWx2) + 30	(DWx4) + 10
Distance between jambs*	DW - 31	(DWx2) - 42
Distance over jambs (Arch)	DW + 13	(DWx2) + 6
Distance over jambs (Grvd)	DW + 31	(DWx2) + 20
Floor to top of head (Arch)	DH + 38	DH + 38
Floor to top of head (Grvd)	DH + 49	DH + 49
Floor to underside of head*	DH + 18.5	DH + 18.5
All dimensions in millimetres. DH=Door Height,DW=Door Width  * = Same calculations for Architrave (Arch) & Grooved (Gryd) jambs		

### How to specify (example)

Product:	<ul> <li>CS SpaceMaker</li> <li>by CS Cavity Sliders</li> </ul>
Location:	~ Living room
Door leaf dimensions:	~ 2040mm x 820mm
Door type:	<ul> <li>Flush Paint Quality</li> </ul>
Single or Bi-Parting:	~ Single
Jamb type & finish:	~ Pine flat (for architraves)
Framing material & size:	~ 90mm timber framing
Wall lining thickness:	~ 10mm
Door gear type:	~ CS SofStop 50kg
Handle type:	~ CaviLock CL400 Passage

Full specifications: www.masterspec.co.nz or www.natspec.com.au

## **Configurations**



Single Bi-Parting

# Jamb Options





Operation





Standard

SofStop®

# **Hardware Options**

Ask about the CAVILOCK CL200 or CL400 range of flush door hardware.

See our website for more options.





0800 754 337





info@cavitysliders.com.au

