Rep


Date


Address/ contact

Door ref



Only one Door per Form

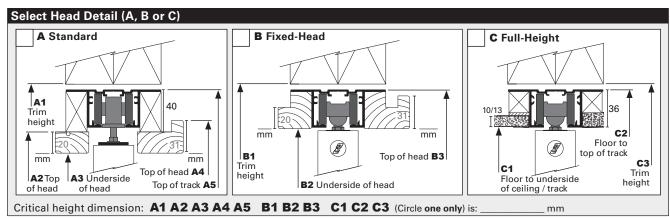

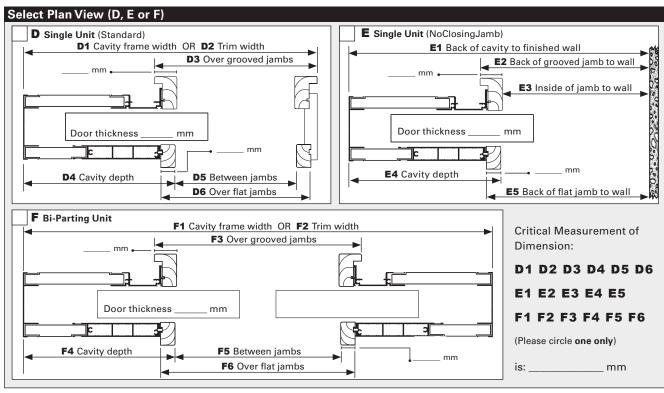

Door

Type

Height_

11.2023	1. Finished floor Required clearance from bottom of do	Finish		
MeasureTimberFormed	mm (minimum 10mm)	10 std Botto	m	H/W
	Proposed total thickness of floor covering (incl. adhesive/underlay): mm (standard 15mm, e.g. typical carpet & underlay)	Floo coveri	25 std	Who is supplying the do
Site	Required clearance from bottom of de	critical measurement		

Required clearance from	n bottom of door to finished floor:
(minimum 10mm)	(typical 10mm)

Flooring:

Cavity Sliders Ltd. 60232

•	, ,	,	
Signed by CS rep	0		
0.904 27 00 .01	Y		
Rep's contact no			
•			

Will cavity frame sit hard on top of the finished or unfinished floor?

Cigned by (or an behalf of austeman)	Auckland
Signed by (or on behalf of customer)	T 09 276

Print name

Please contact your rep for job progress enquiries or contact your nearest office:

Width

d Head Office 09 276 0800 E salesakl@csfordoors.co.nz

10/90/10 13/90/13 Other §SofStop® Soft Close Soft Open he door? Ply Panel (Indicate handing) No door Site Access ОК Track Off Hiab Site Assembly

Waikato

T 07 928 0800 E salesbop@csfordoors.co.nz

Christchurch T 03 348 6158

Options

Wall configuration

E saleschch@csfordoors.co.nz

imberFormed Site Measure Form -