# **₹**TopFix 2T-90<sup>™</sup>



2 door TopFix 2T-90 wardrobe slider with 38mm thick v-groove doors



2 door wardrobe slider



2 door storage cupboards



2 door unit with flush doors





\*Conditions apply. CS TOPFIX 2T900™ (O.D.

## FropFix 2T-90™

#### **Features**

The CS TopFix 2T-90 wardrobe slider fits into standard 90mm framing. Timber head jambs are not required, making it easier to install and finish than similar products on the market. This sliding door track system suits any wardrobe or storage cupboard situation where space is at a premium.

Standard timber doors can be used, ensuring hinged and wardrobe doors match.

- Available with the CS SmartMount System for ease of installation and hassle-free maintenance.
- Vertical jambs can be supplied as optional extras.
- Suits standard 35-38mm thick doors up to 120kg.
- Available with SofStop® soft open/close (max. 50kg).

- No floor track through the opening. Floor guide is hidden within the door overlap.
- Track is pre-treated, ready for painting on site.
- Clip-in pelmet can be painted.
- Supports 2 or 4 door set-up.\*

\*Contact CS for more options.

## **Options**

Incorporate any of the architectural detail options below with the CS TopFix 2T-90 wardrobe slider to create a specific look or to provide a unique solution to your design requirements.





### **Technical Information**

Useful formulas (online calculator on our website)


Dimension Required	2 Door
Trim height*	DH + 90
Floor to underside of track*	DH + 35
Trim width (Arch)	(DWx2) - 2
Trim width (Grvd)	(DWx2) + 20
Distance between jambs*	(DWx2) - 50
Distance over jambs (Arch)	(DWx2) - 12
Distance over jambs (Grvd)	(DWx2) + 10
All dimensions in millimetres. DH = Door Height D	W = Door Width

\* = Same calculations for Architrave (Arch) & Grooved (Grvd) jambs.

#### How to specify (example)

Product:	~	CS TopFix 2T90 Wardrobe Slider
Location:	~	Bedroom 2
Door leaf dimensions:	~	2040mm x 820mm
Door type:	~	38mm flush door
Door finish:	~	Paint Quality
No of doors:	~	2
Jamb type & finish:	~	Pine flat (for architraves)
Framing material & size:	~	90mm timber framing
Wall lining thickness:	~	10mm
Door gear type:	~	CS M6 120kg track system
Handle type:	~	CaviLock CL200 Passage

Full specifications: www.masterspec.co.nz

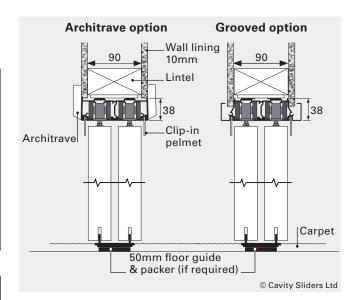

## **Suitable Door Types**

Can be specified with almost any choice of door, including our CS DoorLeaves range.



CS Wardrobe Slider with 4-Lite NewYorker doors









